QUALITY BRASS BODY MANUFACTURING


Brass body poured not forged & manufactured in New Zealand. Mini body design to enable easy installation.



INTERCHANGEABLE SPARE PARTS

All spare parts can be used on either brass or plastic valves.





LONG & SHORT BRASS ARM OPTIONS

D2 Grade & held in with Stainless Steel split pin.
Long Arm = 330mm
Short Arm = 202mm


MATERIALS APPROVED FOR DRINKING WATER

All plastic parts used in the manufacturing of Super~Flo valves have been approved for use with potable water.





MALE ADAPTORS

O-Ring seal short adaptors available in 15-50mm and long adaptors from 15-32mm. Manufactured from High Quality Glass Fibre Reinforced Nylon for a weather, termite, fungi & bacteria resistance.

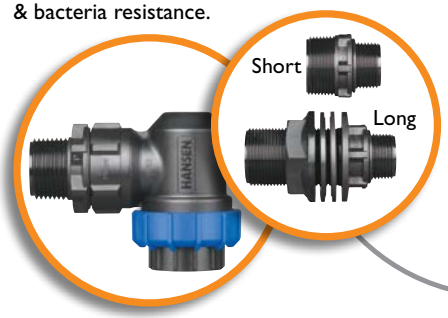

30% BIGGER BODY FOR GREATER FLOWS



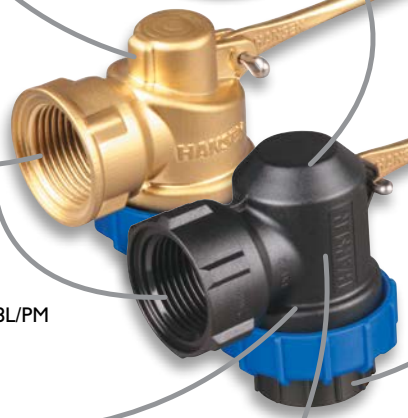

HiViz Float

Blue Float

Note: Floats not included and available as a separate accessory



HAND TESTED

HAND TESTED

All Hansen Super~Flo Valves are rigorously hand tested using water.

HIGH FLOW RATE

29 PSI, 188L/PM



FEMALE BODY CAP

Use to supply portable troughs, washdowns, irrigation systems and other applications.

Retail Packaging






STRONG LONG LIFE SEAL

Versatile, Tuff, Double Sided Urethane Seals.


HELP ELIMINATE VALVE STICKING

Patent Pending Slipper Fit Piston designed to reduce valve sticking and tuned to eliminate turbulence, improving flow characteristics.



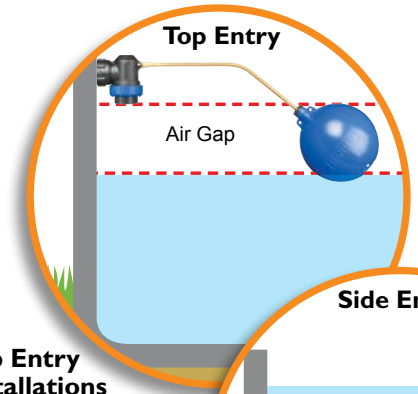

SUITED TO TOP OR SIDE ENTRY

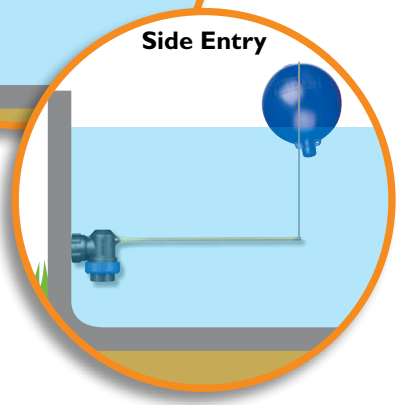

Top Entry Installations

Thread the Super~Flo Valve into existing trough fitting. Screw the float on to the brass arm. Hold the body of the valve at arm entry point. Bend brass arm to achieve the correct on/off and water level.

Side Entry Installations

Thread the Super~Flo Valve into existing trough fitting. Screw the nut with cord onto the Super~Flo Brass arm. Thread cord through the Super~Flo float. Tie the cord off to achieve the correction/off and water level. Note: Cord & Nuts for side entry installations are included with Long Brass Arm packs only.

HDB159 1407

HANSEN™

Super~Flo Valves

Reliable High Performance Trough Valve

www.hansenproducts.com